



# Proof Paper

BEST PROOFING SOLUTIONS



## EFI Gravure Proof Paper 4245 Semimatt

Coated universal semimatt proof paper for offset- and gravure printing . Excellent to use with dye and pigmented inks. The FOGRA certification was granted for rotogravure printing (S1 and S2) and also for offset printing (PT3).



## Advantages of the EFI Gravure Proof Paper 4245 Semimatt

### Further reduced content of optical brighteners

The new EFI Gravure Proof Paper contains further reduced optical brighteners compared to the proven Best Remoteproof Paper 9180 Semimatt. The lower content eliminates disturbing UV influences on spectralphotometric measurements; the measuring values with or without UV-Filter are almost identical. The EFI Gravure Proof offers the best possible measuring conditions for efficient color management and especially brings the optical perception in agreement with the measured values.

for Proofing and Digital Photo

### Appearance resembles production paper


The brighter the paper surface, the larger the obtainable color gamut will be. Spectralphotometric measurements of the EFI Gravure Proof Paper show a very high brightness value (L\*-value) of 94,59. The weight of 245 g/sqm also contributes to the optimal application as a proofing paper. The backprint visible on each sheet enables the identification of the correct paper type in daily use.

### Universal proofing paper for offset and rotogravure applications

In most cases the simulation of the production paper in the proofing system becomes redundant due to the special coloration of the paper. The very low content of optical brighteners also eliminates an important source of metamerism effects.

### Excellent drying characteristics

Accelerated ink drying and the excellent wipe fastness of the proofs facilitate the practical daily application.

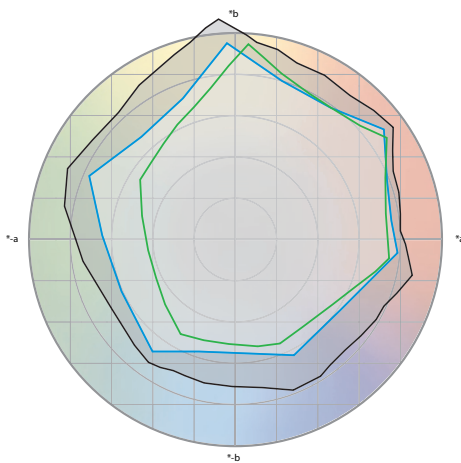

- UltraChrome Tinte auf 4245
- ISO coated
- PSRgravureLWC (S1)

### Sizes

#### Rolls

245g/sqm

25,4 cm x 30 m (10'')	3' *
32,9 cm x 10 m (13'')	2'
32,9 cm x 30 m (13'')	3' *
36,0 cm x 30 m (14,17'')	3' *
43,2 cm x 30 m (17'')	3' *
50,8 cm x 30 m (20'')	3' *
61,0 cm x 30 m (24'')	3' *
91,4 cm x 30 m (36'')	3' *
106,7 cm x 30 m (42'')	3' *
111,8 cm x 30 m (44'')	3' *
127,0 cm x 30 m (50'')	3' *
135,0 cm x 30 m (53,125'')	3' *
137,0 cm x 30 m (54'')	3' *
152,4 cm x 30 m (60'')	3' *

#### Sheets

245g/sqm
DIN A4
SUPER A4
DIN A3
DIN A3+
A3++
DIN A2
8,5 x 11''
11 x 17''

\*) rolls are supplied with each a pair of 3'' to 2'' core adapters.



www.efi.com



www.tecco.de